



57 Pinckney St.








57 Pinckney St.



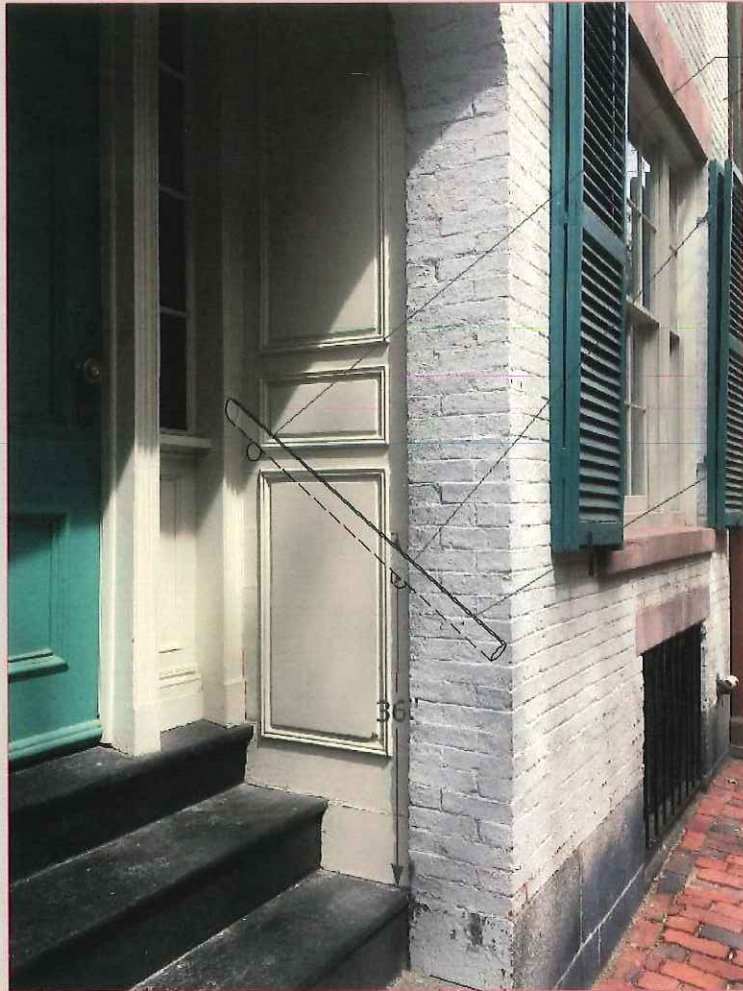

Loc of Upper Rail Bracket

Loc of Lower Rail Bracket.

Brass rail brackets to be attached to existing wood paneling so as not to damage raised panel trim or fluting on brickmold. Nothing to be attached to masonry. □

Rail to be cylindrical wood, 1-1/2" diameter, approx 34" long, painted to match existing, previously-approved color of door surround (Benj. Moore Moorgard GN-109).

Rail to be mounted with the top at a height of 36" above the stair nosings, with 1.5" to 3" clearance between the rail and the wall.

Top end of rail to be mitered to match plane of brickmold, and installed so as not to damage brickmold.

Bottom end of rail to be rounded (not shown in drawing) not to protrude beyond front facade of house.

65 Pinckney



65 Pinckney rounded end of wooden rail





50 Pinckney



50 Pinckney bracket



Pinckney St bracket






43 Pinckney



43 Pinckney bracket

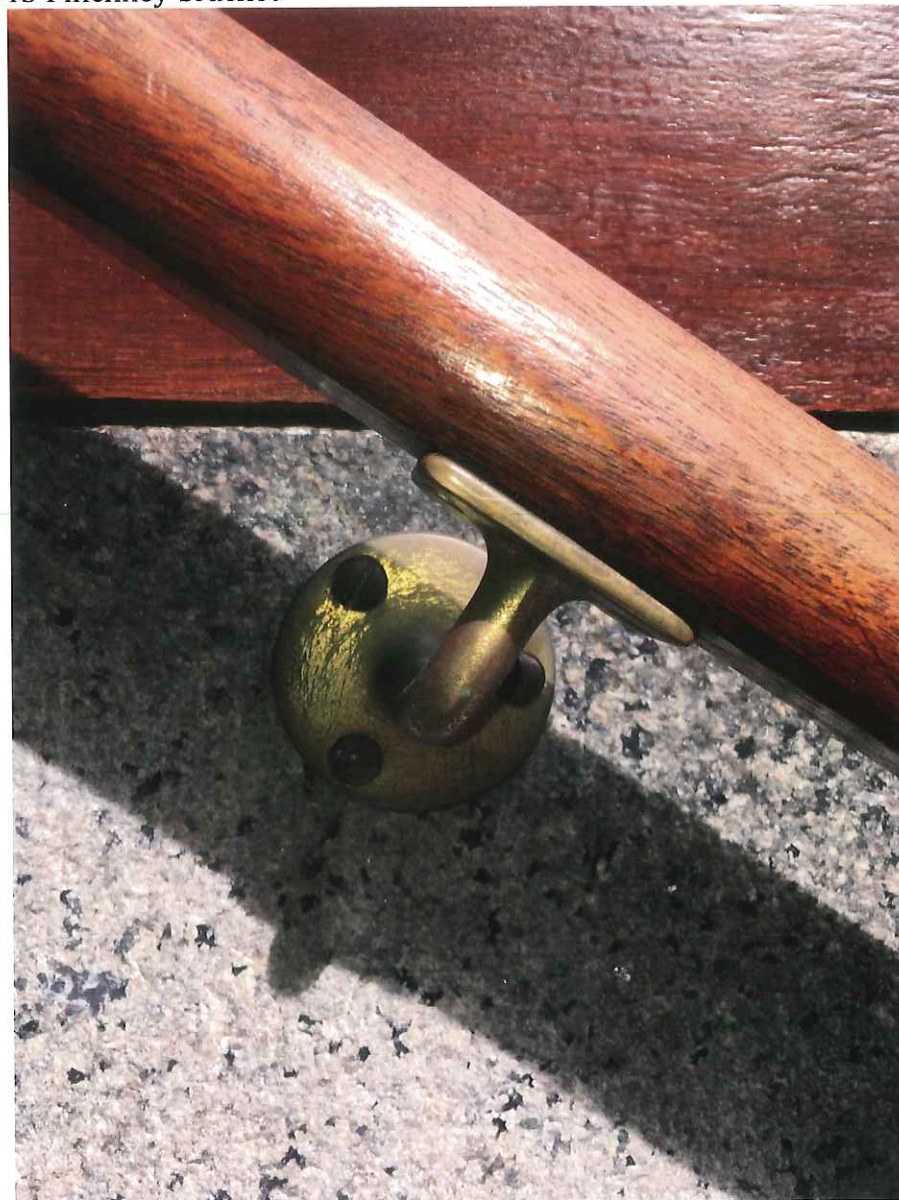



19 Louisburg Sq.



19 Louisburg mounting block

